


Schema ottico

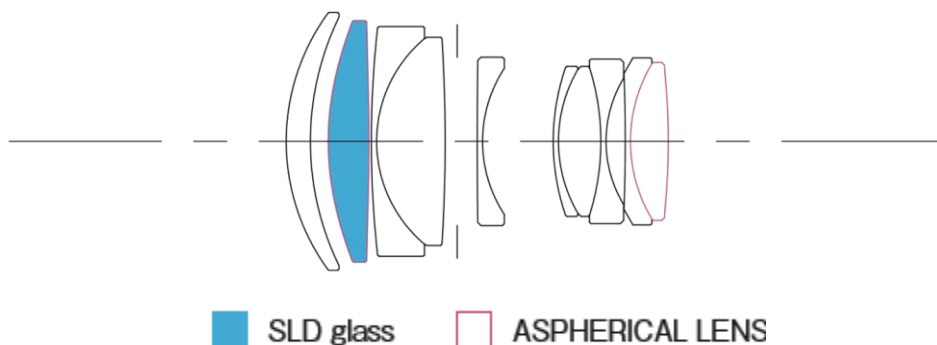

SPECIFICHE

Schema ottico	10 elementi in 6 gruppi
Apertura minima	F16
Angolo di ripresa	Sony E-Mount 28.5° Canon EF-M Mount 26.9° Micro Four Thirds Mount 21.9° L-Mount 28.5° FUJIFILM X Mount 28.5°
Distanza di messa a fuoco minima	50 cm / 19,7 in.
Dimensioni (diametro x lunghezza)	Sony E-Mount φ66.5mm × 59.5mm / φ2.6in. × 2.3in. Canon EF-M Mount φ66.5mm × 59.5mm / φ2.6in. × 2.3in. Micro Four Thirds Mount φ66.5mm × 58.1mm / φ2.6in. × 2.3in. L-Mount φ66.5mm × 57.5mm / φ2.6in. × 2.3in. FUJIFILM X Mount φ66.5mm × 59.8mm / φ2.6in. × 2.4in.
Lamelle del diaframma	9
Massimo rapporto d'ingrandimento	1:7.4
Peso	Sony E-Mount 280g / 9.9oz. Canon EF-M Mount 280g / 9.9oz. Micro Four Thirds Mount 256g / 9.0oz. L-Mount 285g / 10.1oz. FUJIFILM X Mount 280g / 9.9oz.
Diametro del filtro	Φ55mm